


LC-WD-T135 SOLAR PANEL-SOLAR LUMINAIRE 100%

SOLAR STREET LIGHT

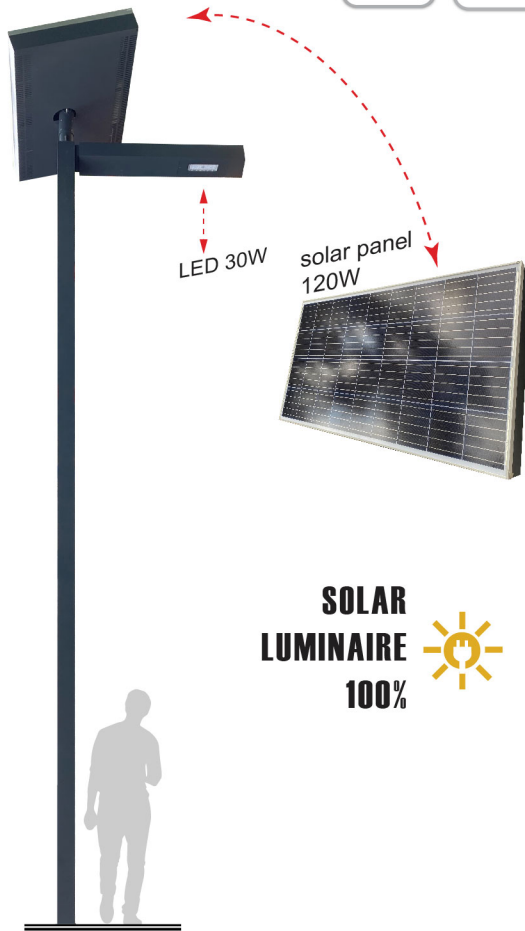


SOLAR LUMINAIRE 100%

SPECIFICATION

- Model** : LC-WD-T135 SOLAR PANEL-SOLAR LUMINAIRE 100%
- Color** : Matt Anthracite (V322401S)
- Size** : W200 x L1100 x H5500 mm.
Lamp pole 100 x 200 mm.
- Light Source** : lumileds (Phillips)
- LED Power** : 30W
- Led Efficiency** : 120 lm/w 3600lm
- CCT** : 4000K
- Solar Panel** : 18V 120W polysilicon solar panel,
Size 1180 x 680 x 30mm.
- Battery** : 8V 48Ah lithium battery (32650)
- Working Time** : SDH-30W light control + time control
low voltage constant current integrated controller 15A
It lasts for 3-5 cloudy and rainy days,
lighting for 8-10 hours every day,
and lighting in three time periods,
the first period of 4 hours is 100%,
the middle period of 3 hours is 70%,
and the last period of 3 hours is 50%

DIMENSION (Unit of mm.)

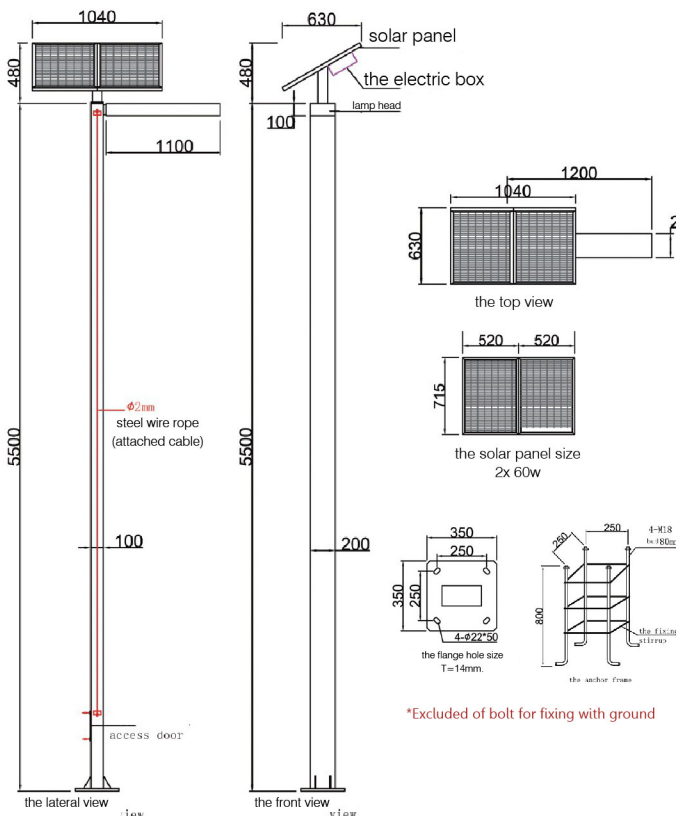

- Material** : Good quality aluminum lamp head T3.0mm. Q235 hot-dip galvanized steel tube lamp pole T3.0mm. Optical lens diffuse. The exposed fastening screws, nuts is 304 stainless steel.
- Craftwork** : Outdoor UV Spray Powder
Anti-rotten/acid. alkali. thickness 80um, fastening screws, nuts of stainless steel (exposed).
- IP** : 65
- Fix The Wire** : Stainless steel

SOLAR PANEL

TYPE	POLYCRYSTALLINE SILICON SOLAR CELLS
MATERIAL	(polycrystalline, p-Si)
POWER EFFICIENCY	15%-19%
LIFETIME	20 year